


REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED

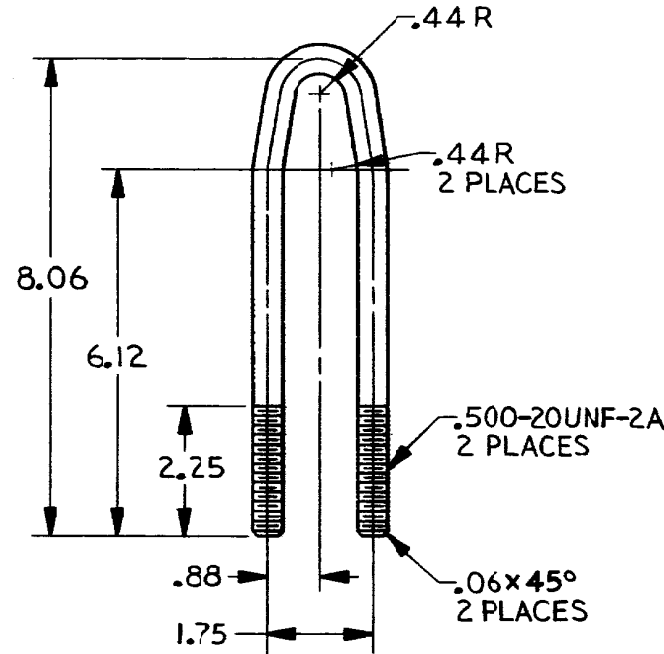

4. APPLY PART NO.  
PER MIL-STD-130
3. PLATING, CADMIUM  
TYPE II, CLASS 3  
SPEC QQ-P-416  
PRIME PER SPEC TT-P-636  
OR SPEC MIL-P-8585  
EXCEPT OMIT PRIMER ON THREADS

2. NO DECARBURIZATION OF  
THREADS PERMISSIBLE

1. STEEL, ALLOY  
4130, 8630, OR 5130  
COND TN OPTL  
SPEC QQ-S-624  
.500 DIA  
QUENCH & TEMPER RH<sub>c</sub> 23 TO 32

PART NO. 11643473

FIG 43468 SPECIAL DEC 43468 TOOLS SEE ENGINEERING RECORDS NEXT ASSY USED ON APPLICATION		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES UNLESS OTHERWISE SPECIFIED ± .03 ± 5° MATERIAL SEE NOTE 1 DATE ISSUED 3-2-72	CONTRACT NUMBER DA-04-200-AMC-3164 CONTRACTOR PACIFIC CAR & FRY CO BIRMINGHAM, ALA DRAWN BY 88 DATE 2-11-72 CHECKED <i>[Signature]</i> DESIGNED <i>[Signature]</i> DESIGN APPROVAL	US ARMY TANK AUTOMOTIVE COMMAND WARREN, MICHIGAN 48090 U-BOLT SIZE B CODE 19207 SCALE 1/2
---	--	---	---	--

INTERPRET DRAWING IN ACCORDANCE WITH  
STANDARDS PRESCRIBED BY MIL-STD-100